
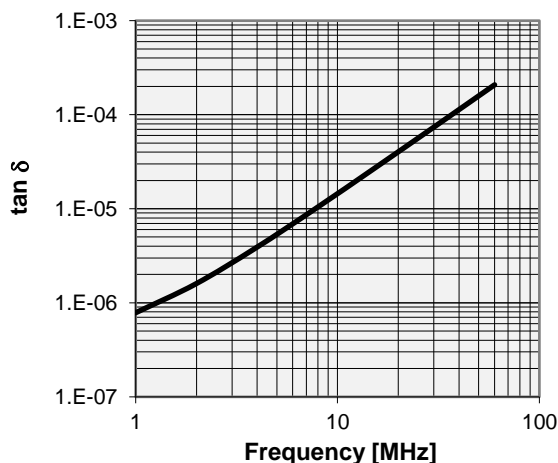
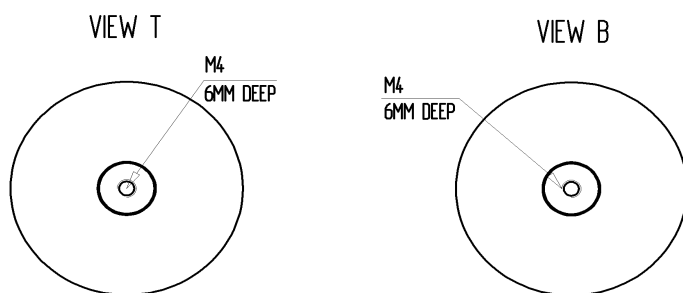
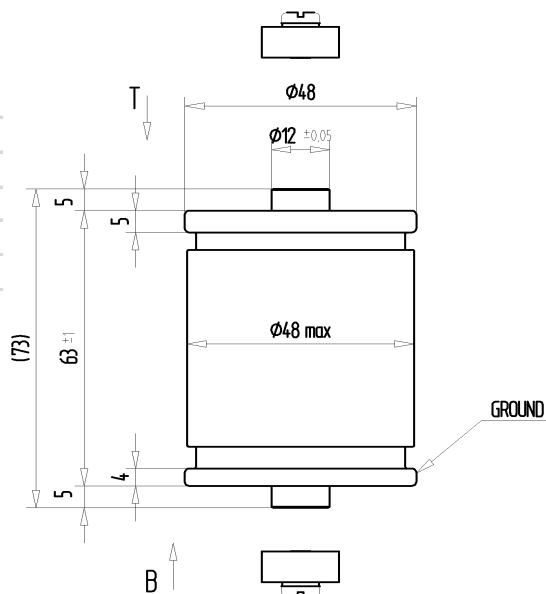
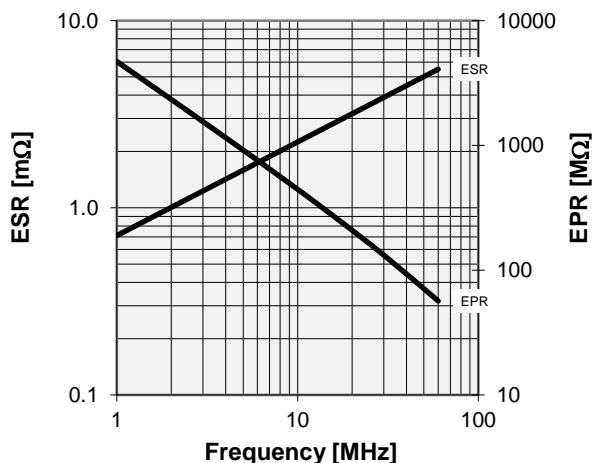


CFMN-100DAC/30-AF-E

Specifications

| | |
|---|---------------|
| Capacitance C_{max} (nominal) | 100 pF |
| Voltage (Peak Test U_{pt} / Peak Working U_{pw}) | 30 kV / 18 kV |
| Capacitance Tolerance | 1% |
| Max. Current I_{max} at 13.56 MHz with | 108 Arms |
| Conduction Cooling | 50 W |
| Net Weight | 0.52 kg |

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

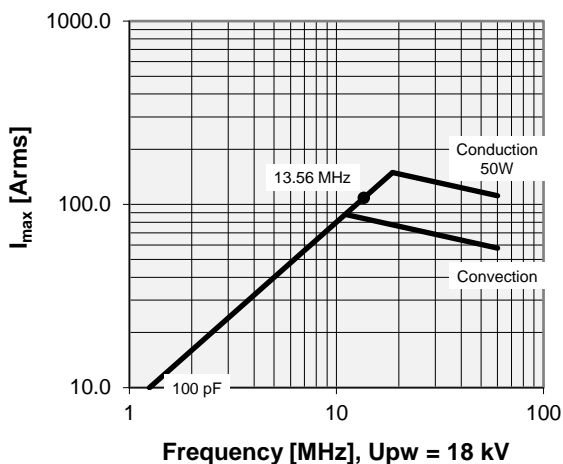

Special Features:
Capacity Tolerance 1%, RoHS Compliant

Note:
Technical information in Service Bulletin
SB-52 must be considered
Subject to change without prior notice