




CFMN-125DAC/30-AF-G

Old Type Designation: MC2C-125E



Specifications

Capacity C_{max} (nominal)	125 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Capacity Tolerance	5%
Max. Current I_{max} at 13.56 MHz with	135 Arms
Conduction Cooling	50 W
Net Weight	0.55 kg

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

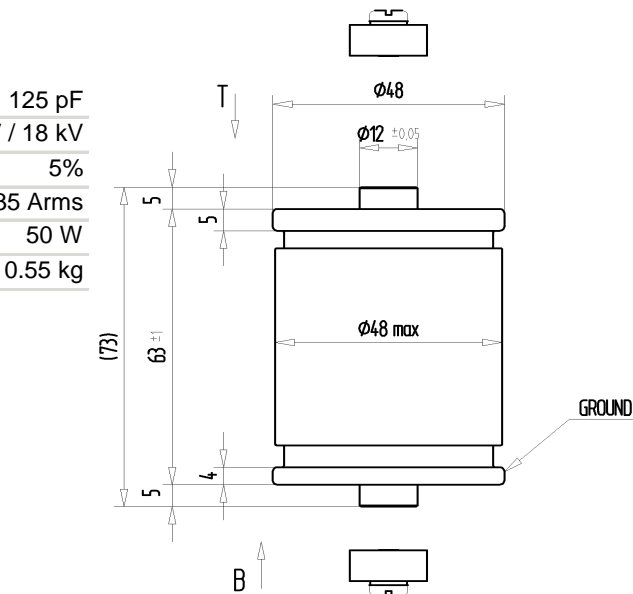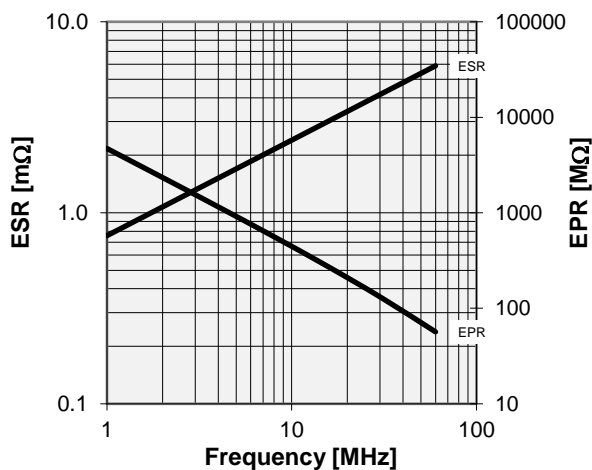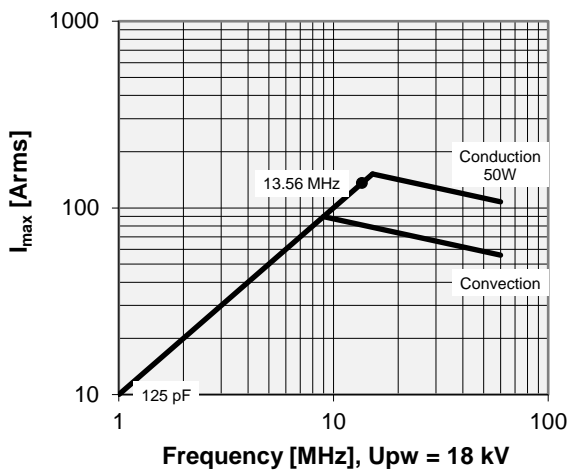

MOUNTING KITS 058-070 ENCLOSED

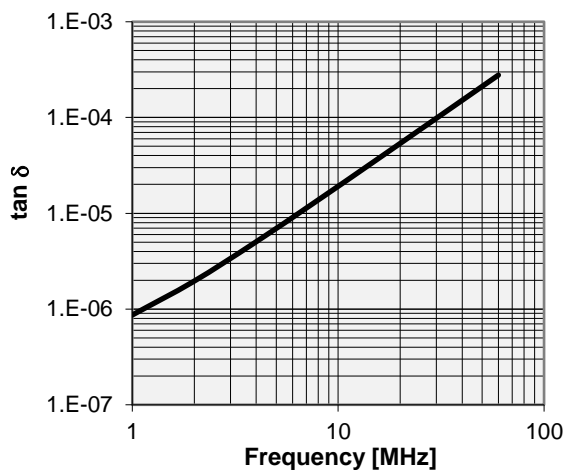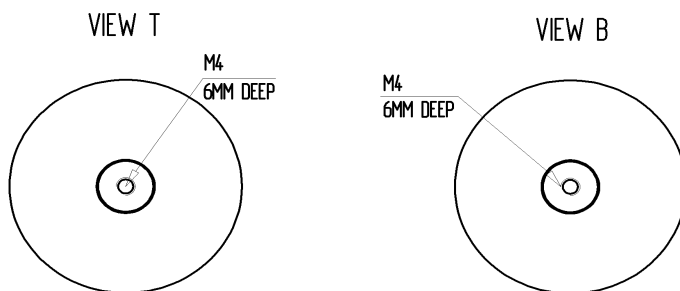

Special Features:
Capacity Tolerance 5%

Note:
 Technical information in Service Bulletin
 SB-52 must be considered
 Subject to change without prior notice

Issue: 30-Oct-2007
 Replaces: 21-Jun-2003
 pct.comet.tech