


CFMN-130CAC/15-AF-E





Old Type Designation: MC1C-130E

Specifications

| | |
|---|--------------|
| Capacity C_{max} (nominal) | 130 pF |
| Voltage (Peak Test U_{pt} / Peak Working U_{pw}) | 15 kV / 9 kV |
| Capacity Tolerance | 1% |
| Max. Current I_{max} at 13.56 MHz with | 70 Arms |
| Conduction Cooling | 20 W |
| Net Weight | 0.39 kg |

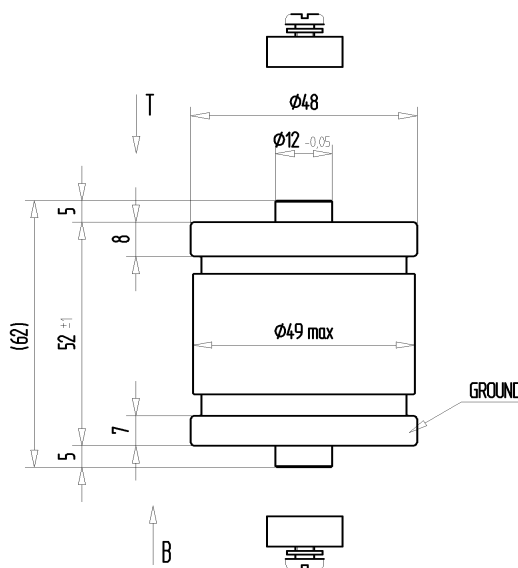

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (20 W) cooling

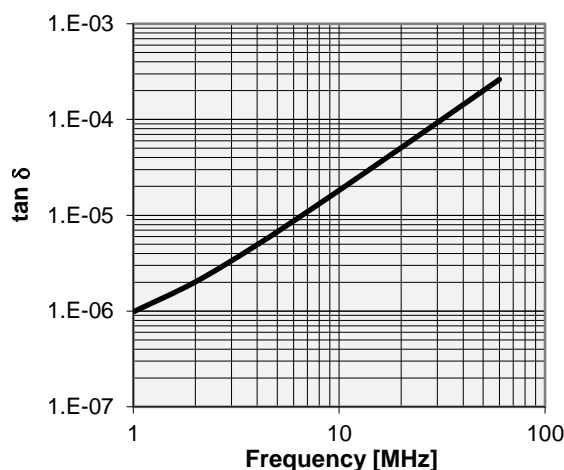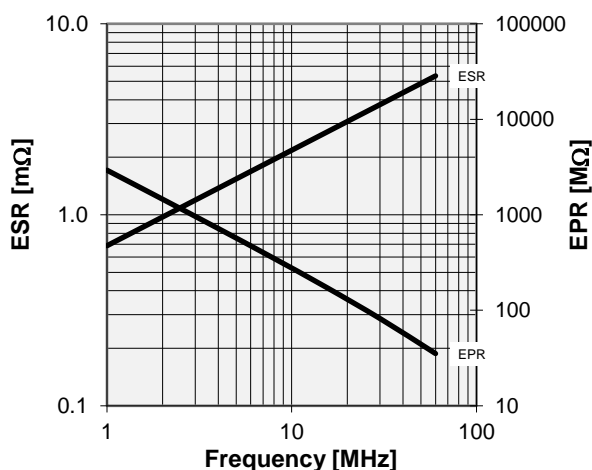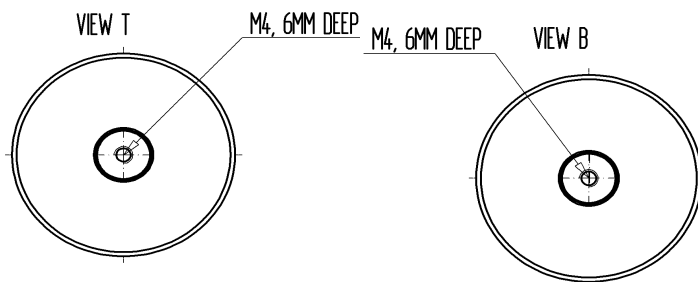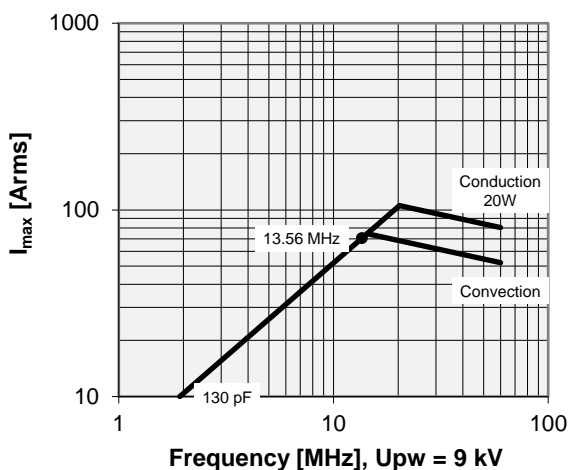

| |
|--------------------------|
| Special Features: |
| Capacity Tolerance 1% |

Note:
 Technical information in Service Bulletin
 SB-52 must be considered
 Subject to change without prior notice

Issue: 18-Feb-2008
 Replaces: 27-Mar-2006
 pct.comet.tech