




CFMN-25DAC/30-AF

Old Type Designation: MC2C-25E



Specifications

Capacity C_{max} (nominal)	25 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Capacity Tolerance	10%
Max. Current I_{max} at 13.56 MHz with	27 Arms
Conduction Cooling	50 W
Net Weight	0.35 kg

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

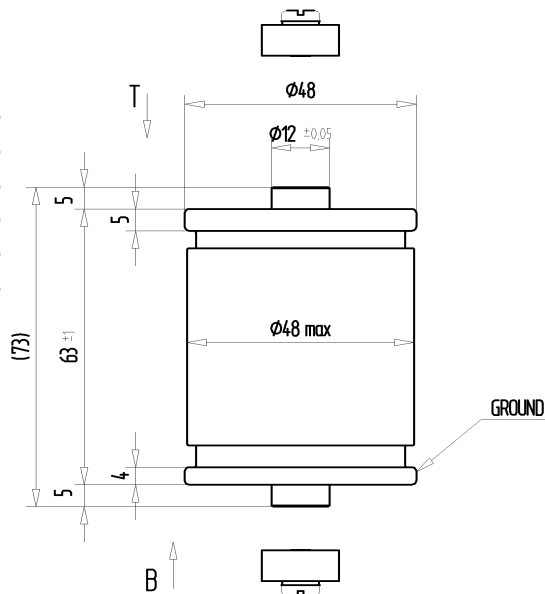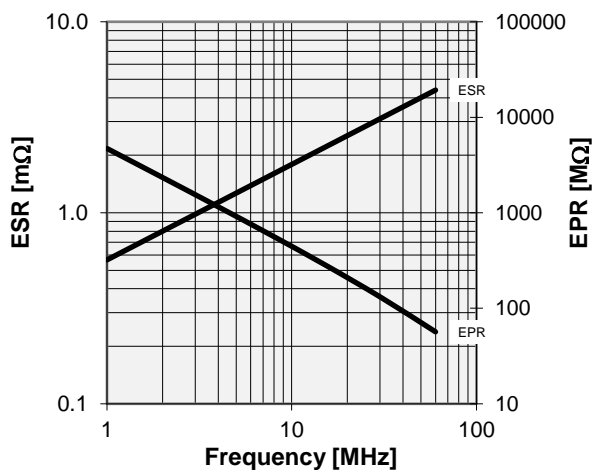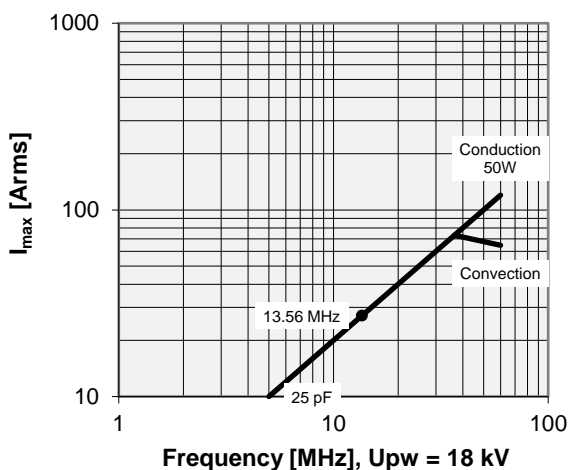

MOUNTING KITS 058-070 ENCLOSED

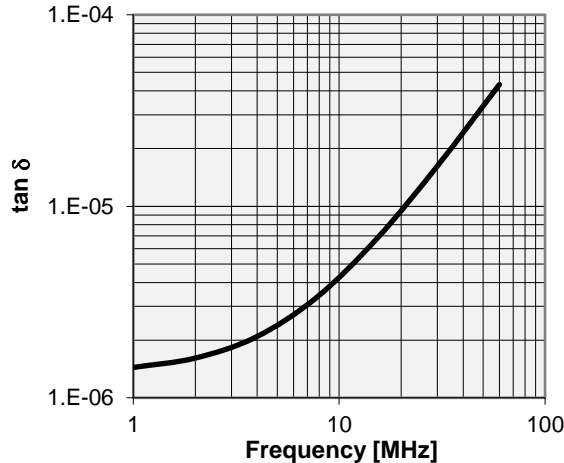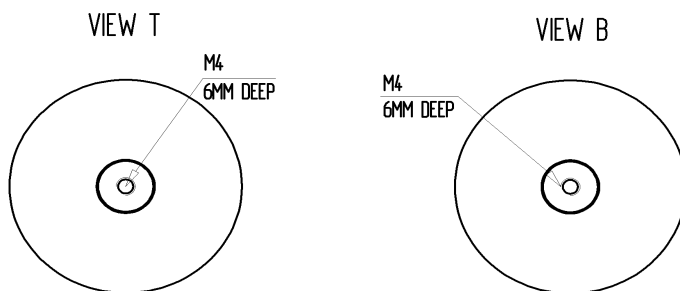

Note:
 Technical information in Service Bulletin
 SB-52 must be considered
 Subject to change without prior notice

Issue: 30-Oct-2007
 Replaces: 12-Mar-2002
 pct.comet.tech