






# CFMN-40CAC/15-AF-G

Old Type Designation: MC1C-40E

## Specifications

Capacity $C_{max}$ (nominal)	40 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	15 kV / 9 kV
Capacity Tolerance	5%
Max. Current $I_{max}$ at 13.56 MHz with	21 Arms
Conduction Cooling	20 W
Net Weight	0.35 kg

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (20 W) cooling

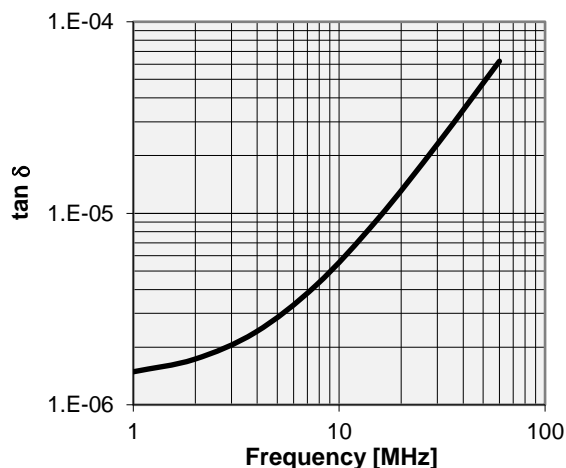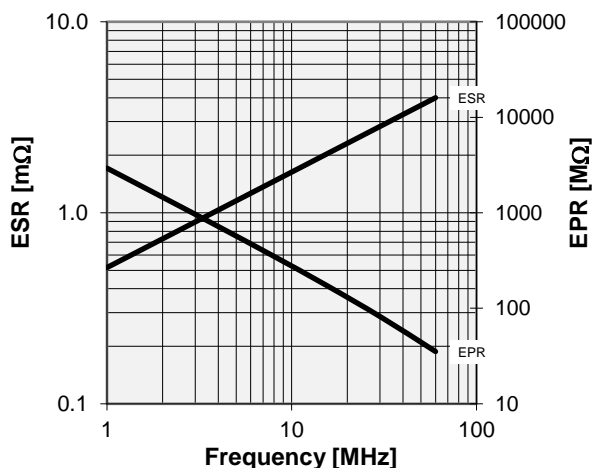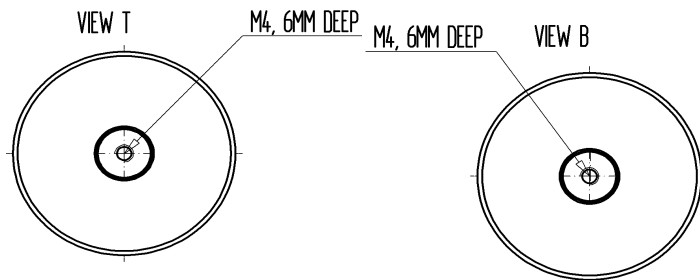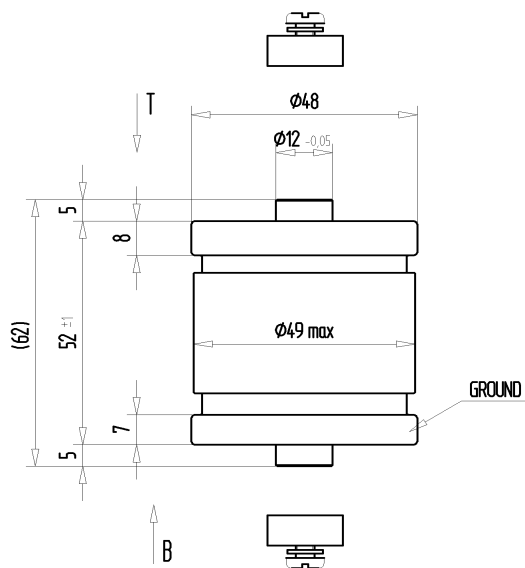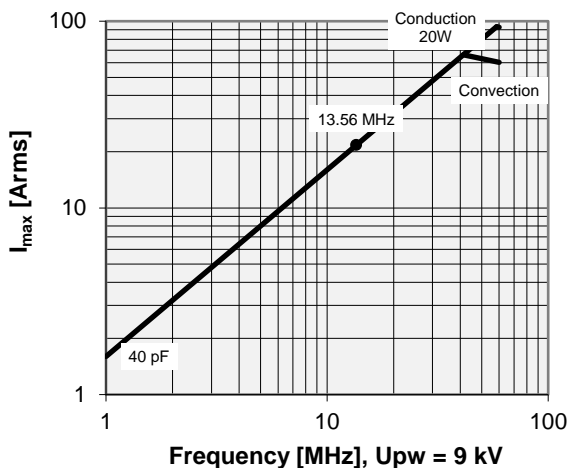

<b>Type Ordering Information:</b>	<b>Upt</b>
CFMN-40CAC/15-AF-G	15 kV

<b>Special Features:</b>
Capacity Tolerance 5%

Note:  
 Technical information in Service Bulletin  
 SB-52 must be considered  
 Subject to change without prior notice

Issue: 27-Mar-2006  
 Replaces: 01-Jun-2004  
 pct.comet.tech