
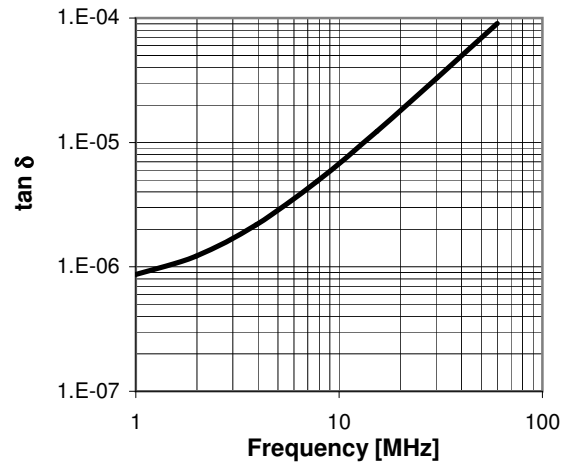
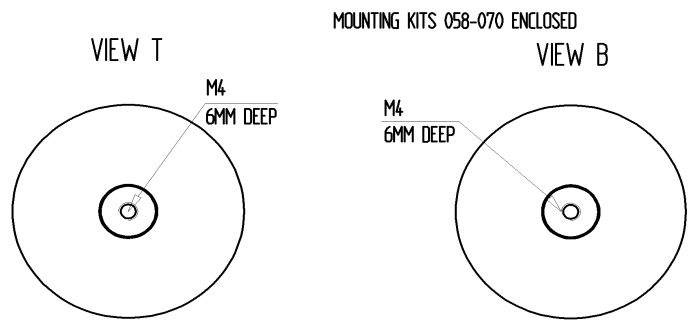
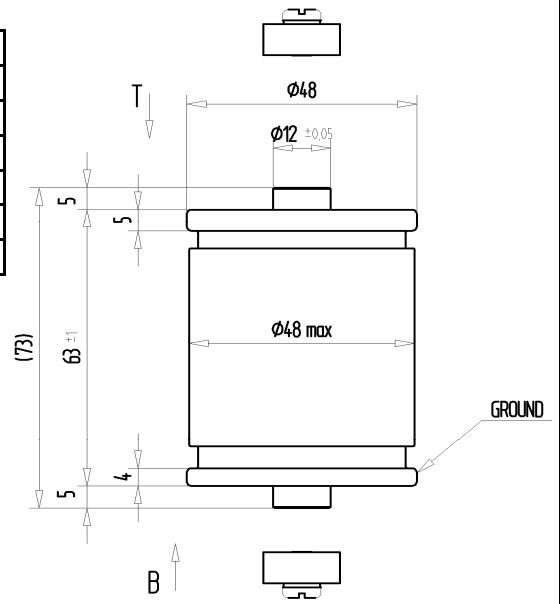
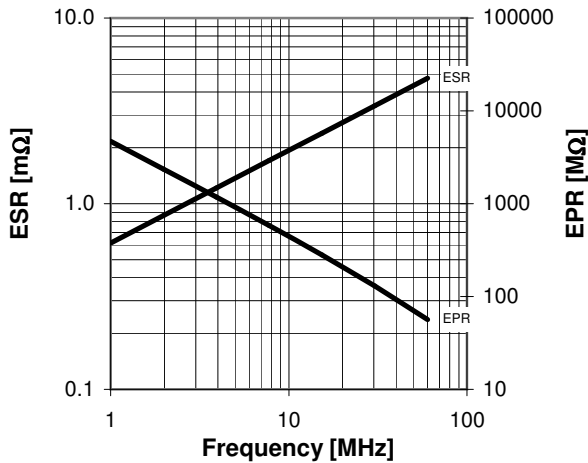


CFMN-50DAC/30-AF-H

Specifications	
Capacity C_{max} (nominal)	50 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Capacity Tolerance	2%
Max. Current I_{max} at 13.56 MHz with Conduction Cooling	54 Arms
Conduction Cooling	50 W
Net Weight	0.38 kg

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

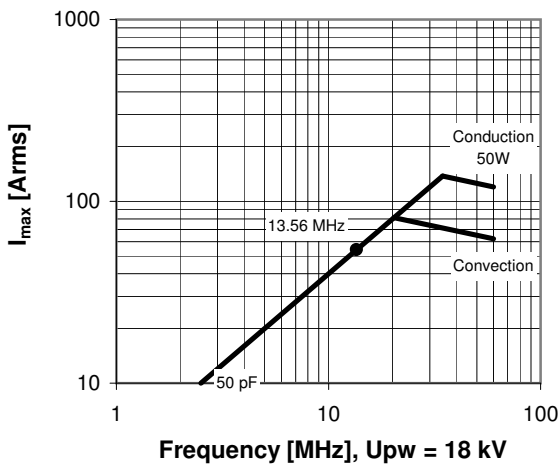

Special Features:

Special C-Curve / Special Capacity Tolerance, RoHS Compliant

Subject to change without prior notice

Note: Technical information in Service Bulletin SB-52 must be considered