




CFMN-50DAC/30-AF

Old Type Designation: MC2C-50E



Specifications

Capacity C_{max} (nominal)	50 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Capacity Tolerance	10%
Max. Current I_{max} at 13.56 MHz with	54 Arms
Conduction Cooling	50 W
Net Weight	0.38 kg

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

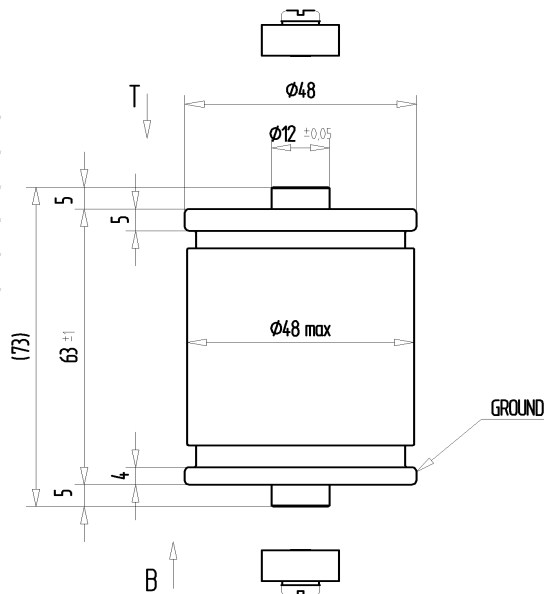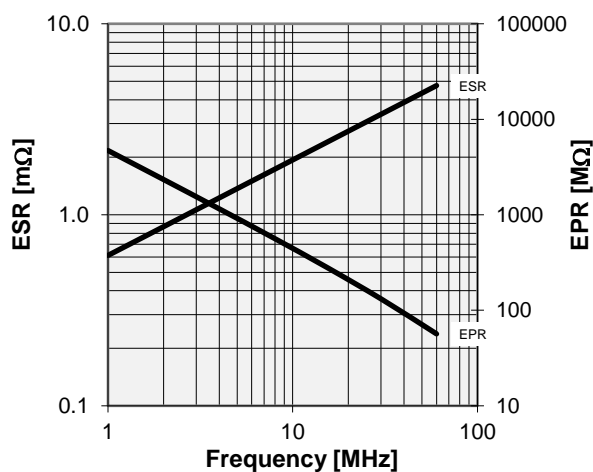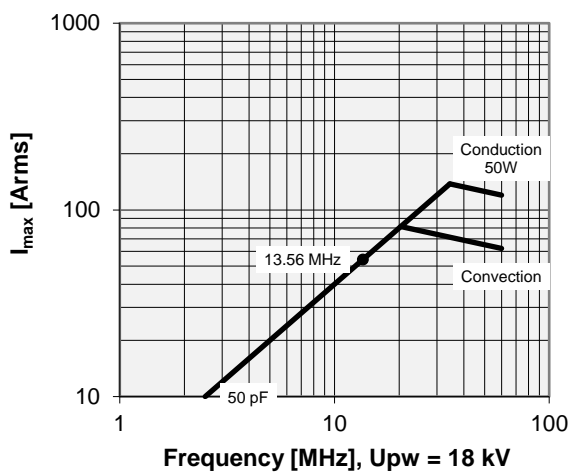

MOUNTING KITS 058-070 ENCLOSED

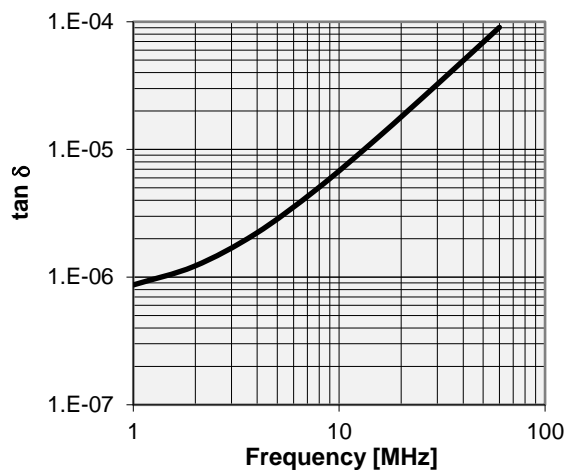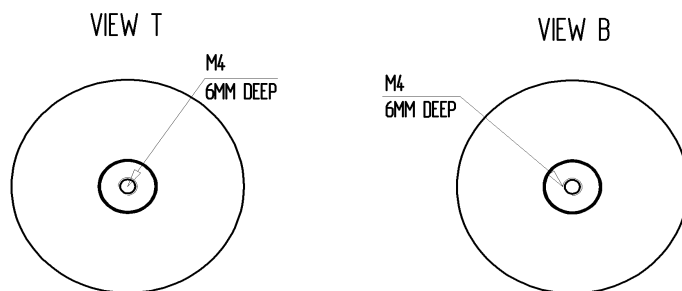

Note:

Technical information in Service Bulletin SB-52 must be considered
Subject to change without prior notice

Issue: 30-Oct-2007
Replaces: 12-Mar-2002