
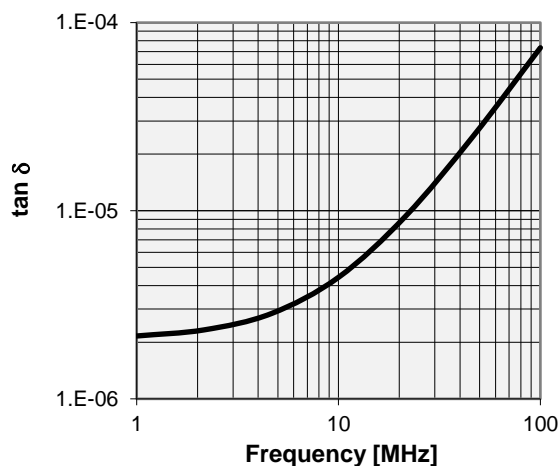
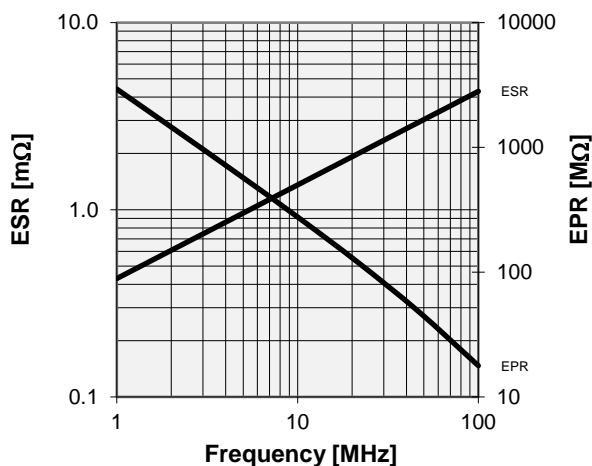
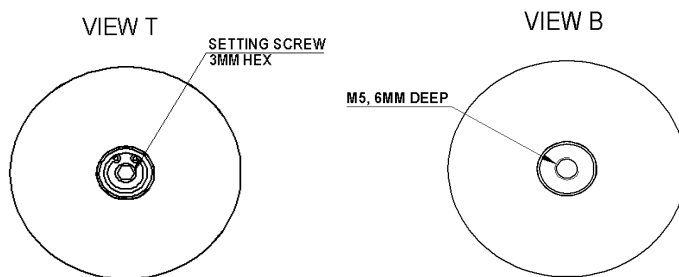
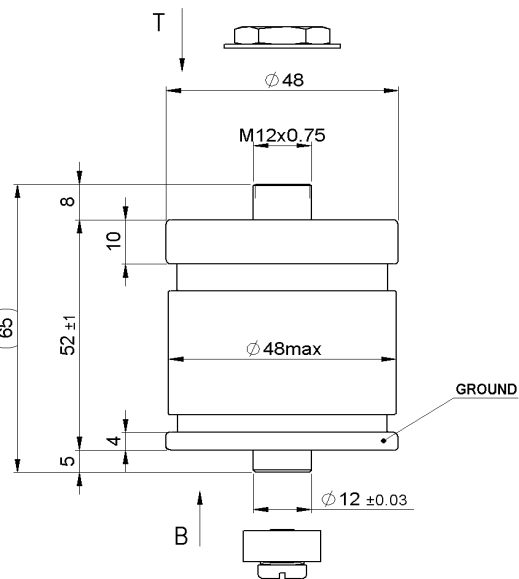


CTMN-21CAC/15-VK

Specifications

| | |
|---|--------------|
| Capacitance C_{max} (nominal) | 26 pF |
| Capacitance C_{min} (nominal) | 16 pF |
| Voltage (Peak Test U_{pt} / Peak Working U_{pw}) | 15 kV / 9 kV |
| Max. Current I_{max} at 13.56 MHz with | 14 Arms |
| Conduction Cooling | 20 W |
| Capacitance per turn | 3 pF |
| Net Weight | 0.42 kg |
| Torque | <0.2 Nm |

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (20W) cooling

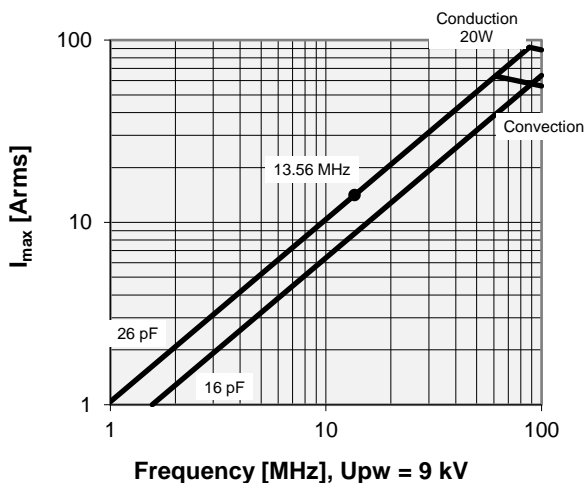

Special Features:

RoHS Compliant

Note:

Technical information in Service Bulletin

SB-52 must be considered

Subject to change without prior notice

Issue: 20-Nov-2013

Replaces: 11-Jul-2013

pct.comet.tech