
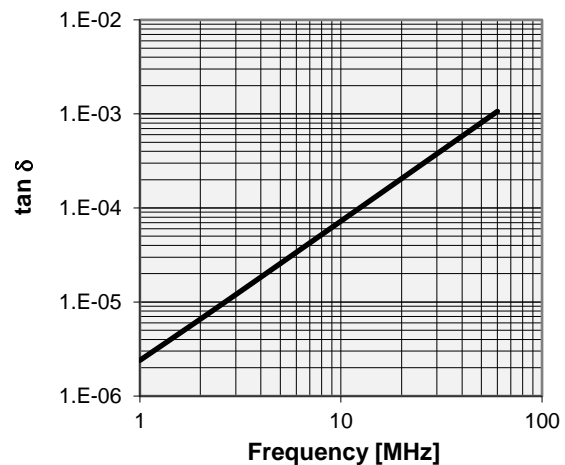
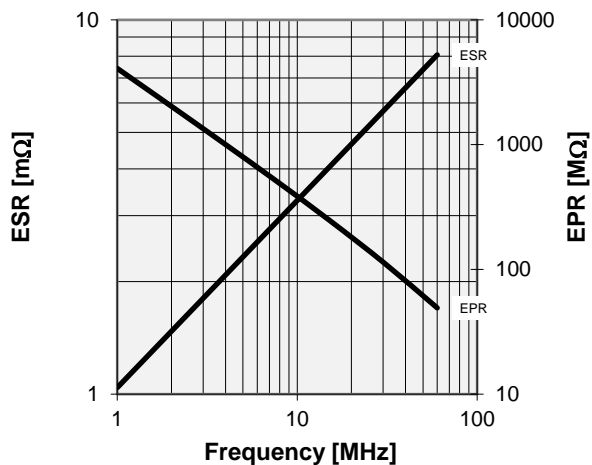
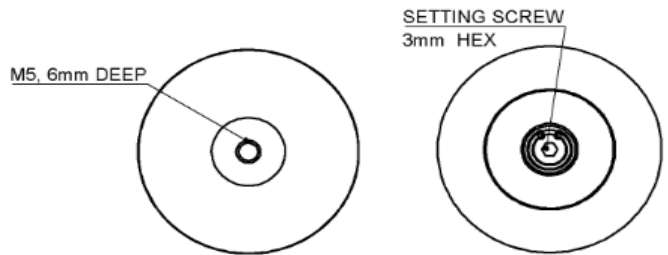
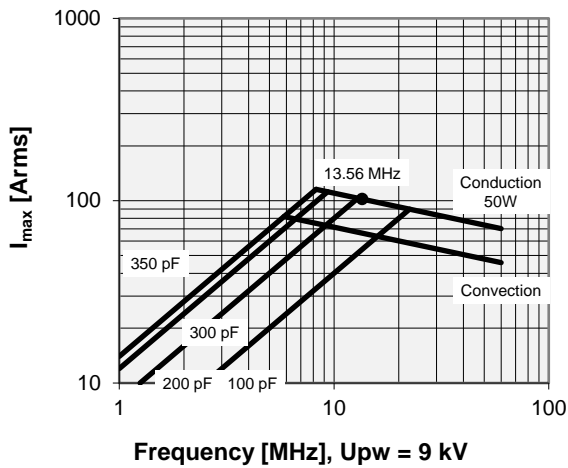


# CTMN-325AAC/15-VK

## Specifications

Capacitance $C_{max}$ (nominal)	350 pF
Capacitance $C_{min}$ (nominal)	300 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	15 kV / 9 kV
Max. Current $I_{max}$ at 13.56 MHz with	101 Arms
Conduction Cooling	50 W
Capacitance per turn	7.8 pF
Net Weight	0.8 kg
Torque	<0.2 Nm

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (50W) cooling

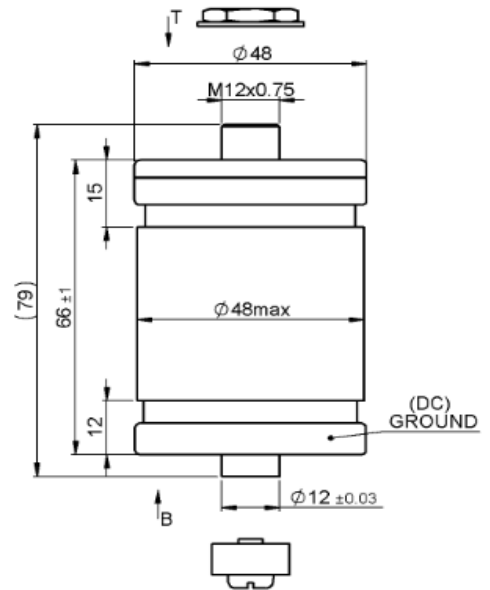

<b>Special Features:</b>
RoHS Compliant

Note:  
 Technical information in Service Bulletin  
 SB-52 must be considered  
 Subject to change without prior notice

Issue: 08-Feb-2018